


Frontfix fX-1,9 indoor

Festinstallation

Technisches Datenblatt

HIGH-BRIGHTNESS
HIGH-CONTRAST
BLACK-BODY
FRONT- & REARSERVICE
FULL & HALF PANELS

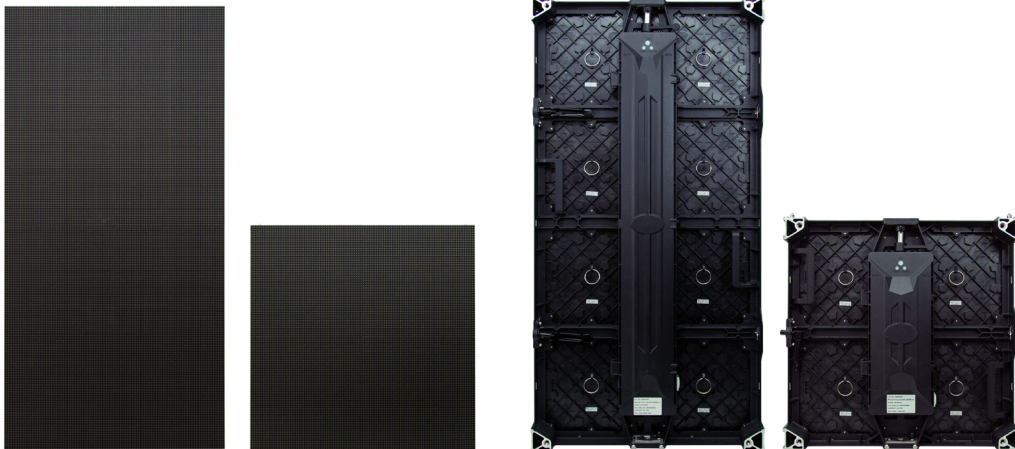

Pixelpitch	1,9 mm
Helligkeit	800 nit
SMD-Typ	Nationstar SMD1010 Copper Wire
SMD Merkmale	High-Brightness, High-Contrast, Black-Body
Farbtiefe	13 Bit
Auflösung	512 x 256 256 x 256 Pixel (Full Half)
LED Treiberchip	ICND2153
Receivingcard	A5S+
Scantyp	1/32
Refreshrate	1.920-3.840 Hz
Horiz. Blickwinkel	+160°/-160°
Vert. Blickwinkel	+160°/-160°
Kontrast	5.000:1
Nennleistung in W	Typ. 60W 30W Max. 180W 90W (Full Half)
Spannungsbereich	AC 220V/ 50 Hz
Stromanschluss	Neutrik powerCON
Abmessungen (BxHxT)	1000x500x83 mm 500x500x83 mm (Full Half)
Gewicht	13,5 kg 7,5 kg (Full Half)
IP Klasse	IP40 / IP21 (Front/ Rückseite)
Temperaturbereich	Im Betrieb: 0°C bis +60°C Lagernd: -40°C bis +55°C
Produkthighlights	Front- & Rearservice, Full & Half Panels
Zertifizierungen	   