


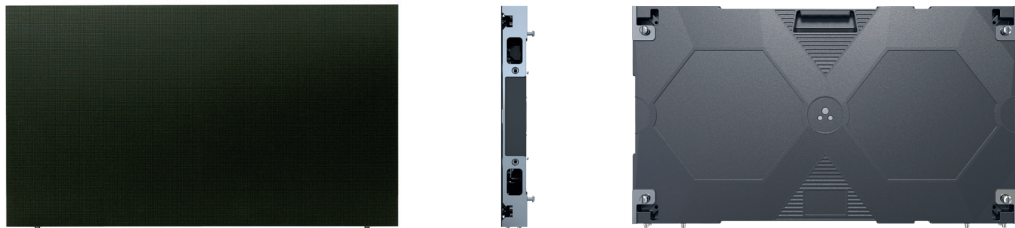


Frontfix hX-1,5 indoor

Festinstallation

Technisches Datenblatt

HIGH-BRIGHTNESS
HIGH-CONTRAST
BLACK-BODY
FRONT- & REAR SERVICE



| | |
|----------------------------|---|
| Pixelpitch | 1,56 mm |
| Helligkeit | 600 nit |
| SMD-Typ | SMD1212 Copper Wire |
| SMD Merkmale | High-Brightness, High-Contrast, Black-Body |
| Farbtiefe | 13 Bit |
| Auflösung | 384 x 216 Pixel |
| LED Treiberchip | ICN2153 |
| Receivingcard | A5S+ |
| Scantyp | 1/27 |
| Refreshrate | 2.880 Hz |
| Horiz. Blickwinkel | +175°/-175° |
| Vert. Blickwinkel | +165°/-165° |
| Kontrast | 3.000:1 |
| Nennleistung in W | Typ. 28W / max. 105W |
| Spannungsbereich | AC 220V/ 50 Hz |
| Stromanschluss | Kaltgerätestecker |
| Abmessungen (BxHxT) | 600 x 337 x 40 mm |
| Gewicht | 5,2 kg |
| IP Klasse | IP40 |
| Temperaturbereich | Im Betrieb: 0°C bis +60°C Lagernd: -40°C bis +60°C |
| Produkthighlights | Front- & Rearservice |
| Zertifizierungen |    EMC |