


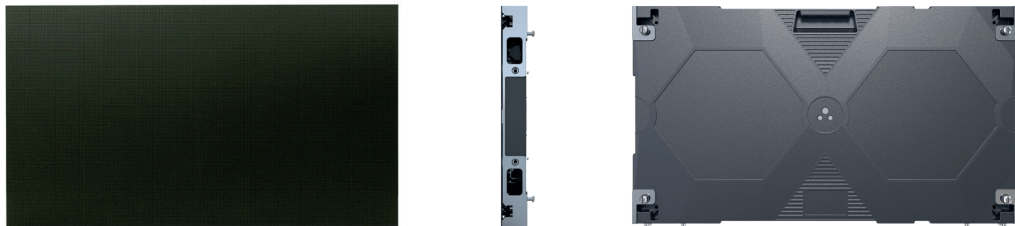


# Frontfix hX-1,8 indoor

# Festinstallation

Technisches Datenblatt

HIGH-BRIGHTNESS  
HIGH-CONTRAST  
BLACK-BODY  
FRONT- & REAR SERVICE



<b>Pixelpitch</b>	1,87 mm
<b>Helligkeit</b>	600 nit
<b>SMD-Typ</b>	SMD1515 Copper Wire
<b>SMD Merkmale</b>	High-Brightness, High-Contrast, Black-Body
<b>Farbtiefe</b>	13 Bit
<b>Auflösung</b>	320 x 180 Pixel
<b>LED Treiberchip</b>	ICN2153
<b>Receivingcard</b>	A5S+
<b>Scantyp</b>	1/30
<b>Refreshrate</b>	3.840 Hz
<b>Horiz. Blickwinkel</b>	+168°/-168°
<b>Vert. Blickwinkel</b>	+145°/-145°
<b>Kontrast</b>	3.000:1
<b>Nennleistung in W</b>	Typ. 36W / max. 135W
<b>Spannungsbereich</b>	AC 220V/ 50 Hz
<b>Stromanschluss</b>	Kaltgerätestecker
<b>Abmessungen (BxHxT)</b>	600 x 337 x 40 mm
<b>Gewicht</b>	5,2 kg
<b>IP Klasse</b>	IP40
<b>Temperaturbereich</b>	Im Betrieb: 0°C bis +60°C Lagernd: -40°C bis +60°C
<b>Produkt highlights</b>	Front- & Rearservice
<b>Zertifizierungen</b>	   EMC