





# rX3io

Technisches Datenblatt

HIGH-BRIGHTNESS  
HIGH-CONTRAST  
BLACK-FACE  
QUICK-LOCK-SYSTEM  
MAGNETIC FAST-RIGG  
MAGNETIC MAINTENANCE TOOL  
CLIMBABLE FRAME  
FAST REPLACEABLE BACKBOX

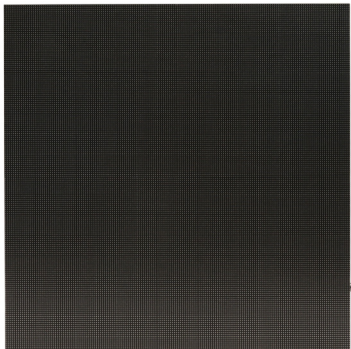

<b>Pixelpitch</b>	3,906mm
<b>Helligkeit</b>	5.500 Nits kalibriert (6.500 max.)
<b>SMD-Typ</b>	Nationstar 1921 3-in-1 RGB
<b>SMD Merkmale</b>	Black-Body, High-Brightness, High-Contrast, High-Level
<b>Farbtiefe</b>	16 Bit pro Farbkanal (48 Bit RGB)
<b>Auflösung pro Panel</b>	128 x 128 Pixel
<b>LED Treiberchip</b>	MBI5151
<b>Scantyp</b>	1/8
<b>Refreshrate</b>	≥ 3840 Hz
<b>Horiz. Blickwinkel</b>	+85°/-85°
<b>Vert. Blickwinkel</b>	+85°/-85°
<b>Kontrast</b>	> 4.000:1
<b>Nennleistung in W</b>	Typisch 75W / max. 170W pro Panel
<b>Spannungsbereich</b>	AC 88-264V/ 50-60 Hz
<b>Anschluss-Typ</b>	powerCON TRUE1
<b>Panelabmessungen</b>	500 x 500 x 100mm (BxHxT)
<b>Gewicht</b>	9,7Kg pro Panel
<b>IP Klasse</b>	IP65
<b>Temperaturbereich</b>	-30°C bis + 45°C (Im Betrieb) -10°C bis + 55°C (Lagernd)
<b>Produkthighlights</b>	Quick-Lock-System, Magnetic Fast-Rigg, Magnetic Maintenance Tool, Climbable Frame, Fast Replacable Backbox
<b>Zertifizierungen</b>	   EMC