

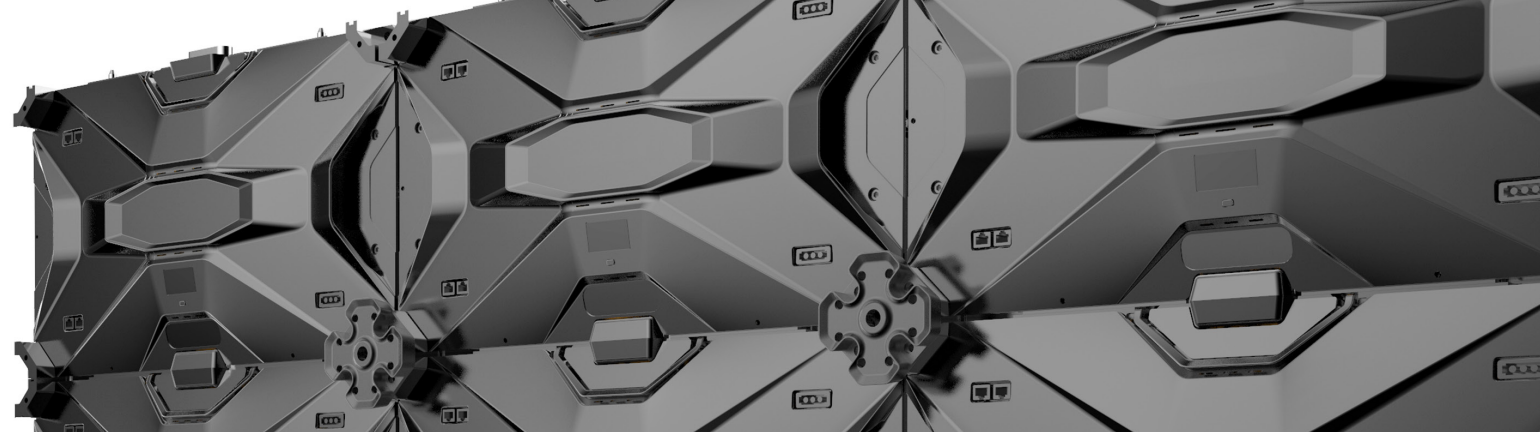





# tX0.9 Frontfix

Technisches Datenblatt



NOVASTAR A9 RECEIVINGCARD  
HIGH-LEVEL  
HIGH-RESOLUTION  
HIGH-CONTRAST  
BLACK-FACE  
SEAMLESS INSTALLATION



<b>Pixelpitch</b>	0,952 mm
<b>Helligkeit</b>	600 nits kalibriert
<b>SMD-Typ</b>	Taiwan Everlight SMD0606 3-in-1 RGB
<b>SMD Merkmale</b>	High-Level, High-Resolution, High-Contrast, Black-Face
<b>Farbtiefe</b>	18 Bit
<b>Auflösung pro Panel</b>	640 x 360 Pixel
<b>LED Treiberchip</b>	MBI5353
<b>Scantyp</b>	1/32
<b>Refreshrate</b>	≥ 2.880 Hz
<b>Horiz. Blickwinkel</b>	120°
<b>Vert. Blickwinkel</b>	120°
<b>Kontrast</b>	> 5.000:1
<b>Nennleistung in W</b>	Typisch 55W / max. 150W pro Panel
<b>Spannungsbereich</b>	AC 88-264V/ 50-60 Hz
<b>Anschluss-Typ</b>	powerCON Blau
<b>Panelabmessungen</b>	609 x 342,56 mm (BxHxT)
<b>Gewicht</b>	9,5 kg pro Panel
<b>IP Klasse</b>	IP40
<b>Temperaturbereich</b>	-10°C bis +30°C (Im Betrieb) -10°C bis +50°C (Lagernd)
<b>Produkthighlights</b>	NovaStar A9 Receivingcard
<b>Zertifizierungen</b>	   EMC