
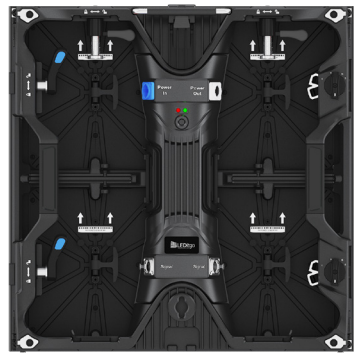



# vP2+ Brompton | Virtual Production Series

## Technisches Datenblatt

BROMPTON R2 RECEIVINGCARD  
 1-6° CONCAVE  
 HIGH-LEVEL  
 BLACK-FACE  
 QUICK-LOCK-SYSTEM  
 MAGNETIC FAST-RIGG  
 FAST REPLACEABLE BACKBOX

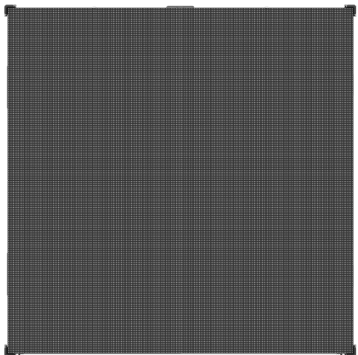

<b>Pixelpitch</b>	2,6 mm
<b>Helligkeit</b>	1.200 nits
<b>SMD-Typ</b>	Nationstar LIGBF1515RGBA-HF
<b>SMD Merkmale</b>	Black-Face, High-Level
<b>Farbtiefe</b>	16 Bit
<b>Auflösung</b>	192 x 192 Pixel
<b>LED Treiberchip</b>	MBI5264
<b>Receivingcard</b>	Brompton R2
<b>Scantyp</b>	1/24
<b>Refreshrate</b>	≥ 3.840 Hz
<b>Horiz. Blickwinkel</b>	+85°/-85°
<b>Vert. Blickwinkel</b>	+85°/-85°
<b>Kontrast</b>	> 5.500:1
<b>Nennleistung</b>	Typisch 44 W / max. 130 W
<b>Spannungsbereich</b>	AC 88-264V/ 50-60 Hz
<b>Stromanschluss</b>	Neutrik powerCON
<b>Abmessungen</b>	500 x 500 x 80 mm (BxHxT)
<b>Gewicht</b>	8,5 kg
<b>IP Klasse</b>	IP40
<b>Temperaturbereich</b>	Im Betrieb: -30°C bis + 45°C Lagernd: -10°C bis + 55°C
<b>EMV-Klasse</b>	A
<b>Produkthighlights</b>	1-6° Concave Installation, Magnetic Fast-Rigg, Fast Replacable Backbox
<b>Zertifizierungen</b>	   EMC