


ULTRA RIGID TECHNOLOGY  
FRONTSERVICE  
BLACK-FACE  
QUICK-LOCK-SYSTEM  
MAGNETIC FAST-RIGG  
VACUUM MAINTENANCE TOOL  
CLIMBABLE FRAME  
FAST REPLACEABLE BACKBOX



|                           |   |
|---------------------------|---|
| <b>Pixelpitch</b>         | 1,9 mm  |
| <b>Helligkeit</b>         | ≥ 1.000 nits (1.200 nits unkalibriert)  |
| <b>SMD-Typ</b>            | Nationstar 1515   |
| <b>SMD Merkmale</b>       | Black-Face, Ultra Rigid Technology  |
| <b>Farbtiefe</b>          | Bis zu 18+ Bit pro Farbkanal  |
| <b>Auflösung</b>          | 256 x 256 Pixel   |
| <b>Refreshrate</b>        | ≥ 2.880 Hz  |
| <b>Horiz. Blickwinkel</b> | +85°/-85°   |
| <b>Vert. Blickwinkel</b>  | +85°/-85°   |
| <b>Kontrast</b>           | > 5.000:1   |
| <b>Nennleistung in W</b>  | Typisch 60W / max. 160W   |
| <b>Anschluss-Typ</b>      | powerCON True1  |
| <b>Panelabmessungen</b>   | 500 x 500 x 100 mm (BxHxT)  |
| <b>Gewicht</b>            | 11,8 kg   |
| <b>IP Klasse</b>          | IP54  |
| <b>Temperaturbereich</b>  | -30° bis +45° (Im Betrieb)<br>-10°C bis +55°C (Lagernd)   |
| <b>Produkthighlights</b>  | Ultra Rigid Technology, Frontservice,<br>Quick-Lock-System, Magnetic Fast-Rigg,<br>Air Maintenance Tool, Climbable Frame,<br>Fast Replaceable Backbox |

**Zertifizierungen**

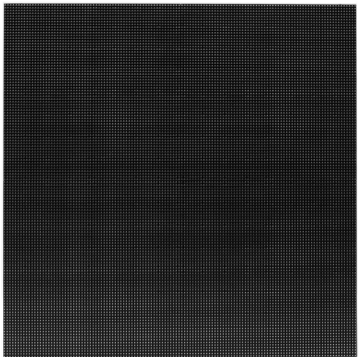