



sB5flex

Technisches Datenblatt

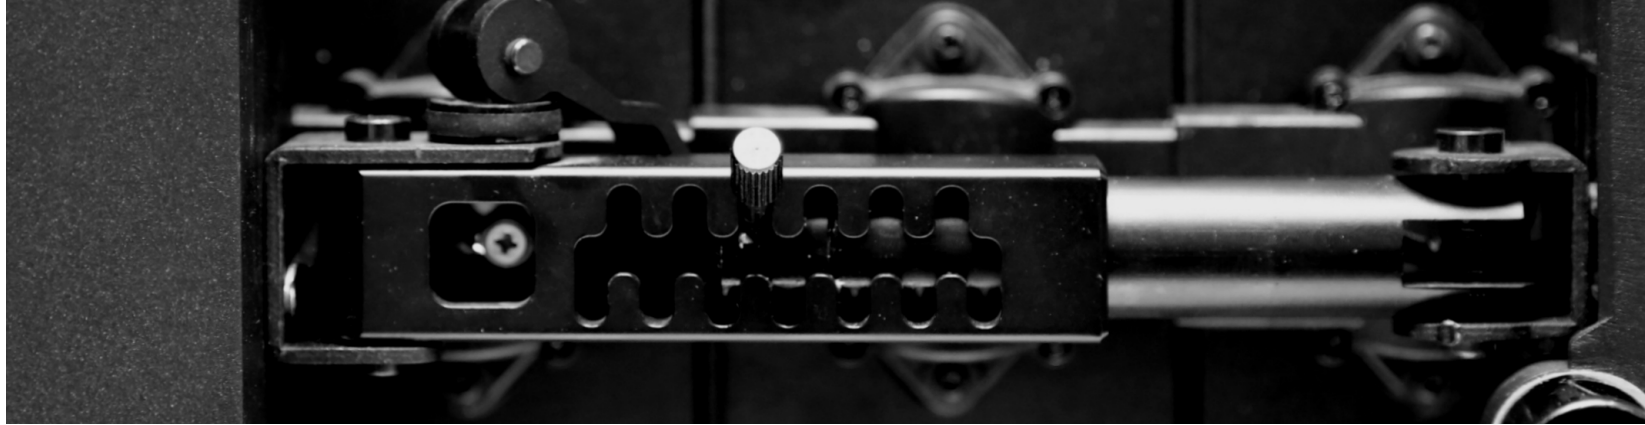

HIGH-BRIGHTNESS
FAST-LOCK-SYSTEM
26-FOLD-ADJUSTABLE
CREATIVE-INSTALLATION-SYSTEM



Pixelpitch	5,9mm
Helligkeit	5000 Nits kalibriert (max. 6500 Nits)
SMD-Typ	Nationstar 2727 3-in-1 Black Body SMD
SMD Merkmale	High-Brightness
LED Treiberchip	SUM 2131
Scanmodus	1/6
Auflösung pro Panel	84 x 84 Pixel
Refreshrate	≥ 2.000 Hz
Horiz. Blickwinkel	+70°/ -70°
Vert. Blickwinkel	+70°/ -70°
Kontrast	≥ 3.000:1
Nennleistung in W	Typisch 65 Watt/ max. 200 Watt pro Panel
Spannungsbereich	AC 90-264V/ 50-60 Hz
Anschluss-Typ	powerCON TRUE1
Panelabmessungen	500 x 500 x 116mm (BxHxT)
Gewicht	11,25Kg pro Panel
IP Klasse	IP65 Front / IP54 Rückseite
Temperaturbereich	-20°C bis +50°C (Im Betrieb) -40°C bis +60°C (Lagernd)
Produkthighlights	Fast-Lock-System, 26-Fold-Adjustable, Creative-Installation-System
Zertifizierungen	UL, CE, RoHS, EMC