


# 496-1,2 MK2 V1

## Technisches Datenblatt

496 x 496 mm

496X496 FRAME  
TOP-LEVEL LED  
BLACK-FACE LED  
ALUMINIUM-STANDSYSTEM  
URT-VERSIEGELUNG

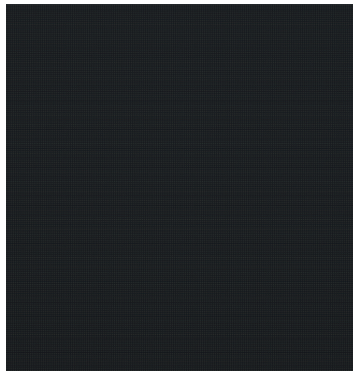

|                            |                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pixelpitch</b>          | 1,29 mm                                                                                                                                                                                                                                                                                                                                                 |
| <b>Helligkeit</b>          | ≥ 800 nits                                                                                                                                                                                                                                                                                                                                              |
| <b>Gewicht</b>             | 9,3 kg                                                                                                                                                                                                                                                                                                                                                  |
| <b>Nennleistung</b>        | Typisch 48 W   max. 200 W                                                                                                                                                                                                                                                                                                                               |
| <b>SMD-Typ</b>             | LEDitgo BF1010                                                                                                                                                                                                                                                                                                                                          |
| <b>SMD Merkmale</b>        | Black-Face, High-Level, CCT                                                                                                                                                                                                                                                                                                                             |
| <b>Farbtiefe</b>           | Bis zu 16 Bit                                                                                                                                                                                                                                                                                                                                           |
| <b>Auflösung</b>           | 384 x 384 px                                                                                                                                                                                                                                                                                                                                            |
| <b>LED Treiberchip</b>     | CFD955                                                                                                                                                                                                                                                                                                                                                  |
| <b>Receivingcard</b>       | Novastar A10s Pro                                                                                                                                                                                                                                                                                                                                       |
| <b>Scantyp</b>             | 1/32                                                                                                                                                                                                                                                                                                                                                    |
| <b>Refreshrate</b>         | ≥ 3.840 Hz                                                                                                                                                                                                                                                                                                                                              |
| <b>Horiz. Blickwinkel</b>  | +140°   -140°                                                                                                                                                                                                                                                                                                                                           |
| <b>Vert. Blickwinkel</b>   | +140°   -140°                                                                                                                                                                                                                                                                                                                                           |
| <b>Kontrast</b>            | 6.000:1                                                                                                                                                                                                                                                                                                                                                 |
| <b>Spannungsbereich</b>    | AC 88-264V   50-60 Hz                                                                                                                                                                                                                                                                                                                                   |
| <b>Stromanschluss</b>      | Seetronic TR1                                                                                                                                                                                                                                                                                                                                           |
| <b>Abmessungen (BxHxT)</b> | 496 x 496   T = 55 mm                                                                                                                                                                                                                                                                                                                                   |
| <b>IP Klasse</b>           | IP 40 Front & Back                                                                                                                                                                                                                                                                                                                                      |
| <b>Temperaturbereich</b>   | -30°C bis +45°C (Im Betrieb)<br>-10°C bis +55°C (Lagernd)                                                                                                                                                                                                                                                                                               |
| <b>Produkthighlights</b>   | Signifikant weniger mechanische Schäden<br>durch speziell vergossene Module                                                                                                                                                                                                                                                                             |
| <b>Zertifizierungen</b>    |     |