


Truckled 3 V2

Technisches Datenblatt

500 x 500 mm

TRUCK OPTIMIZED
 BACKSERVICE
 HIGH BRIGHTNESS
 HIGH CONTRAST
 BLACK BODY
 QUICK-LOCK-SYSTEM

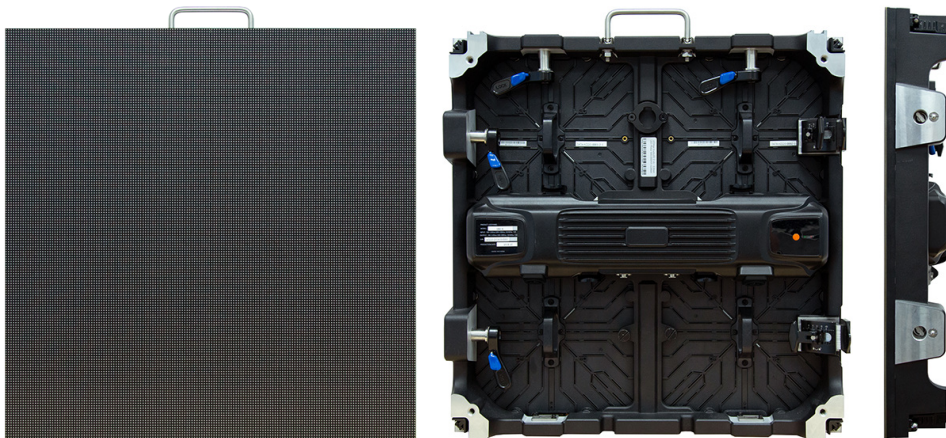

Pixelpitch	3,90 mm
Helligkeit	≥ 5.000 nits
Gewicht	9,1 kg
Nennleistung	Typisch 55 W max. 155 W
SMD-Typ	SMD1921
SMD Merkmale	High-Level, High Contrast
Farbtiefe	Bis zu 16 Bit
Auflösung	128 x 128 px
LED Treiberchip	MBI5251
Receivingcard	Novastar A8s-N
Scantyp	1/8
Refreshrate	≥ 3.840 Hz
Horiz. Blickwinkel	+70° -70°
Vert. Blickwinkel	+35° -65°
Kontrast	> 4.000:1
Spannungsbereich	AC 100-240V 50/60 Hz
Stromanschluss	Neutrik powerCON TRUE1 TOP
Abmessungen (BxHxT)	500 x 500 T= 85 mm
IP Klasse	IP 65 Front IP54 Back
Temperaturbereich	-20°C bis +45°C (Im Betrieb) -20°C bis +45°C (Lagernd)
Produkthighlights	Truck Optimized, Backservice, High Brightness, High Contrast, Black Body Quick-Lock-System
Zertifizierungen	