
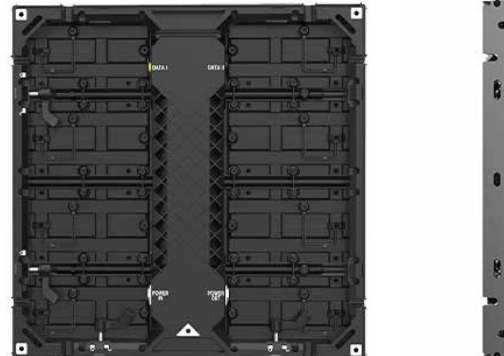


eX1,9E

Technisches Datenblatt

500 x 500 mm

NOVASTAR A5S+ RECEIVINGCARD
 QUICK-LOCK-SYSTEM
 MAGNETIC FAST-RIGG
 100% FRONTSERVICE

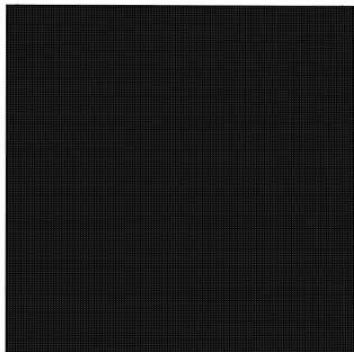

| | |
|----------------------------|--|
| Pixelpitch | 1,90 mm |
| Helligkeit | 800 nit |
| Gewicht | 5,6 kg |
| Nennleistung | Typisch 34 W max. 140 W |
| SMD-Typ | Sinyopto CW 1515 |
| SMD Merkmale | High-Level, Black-Face |
| Farbtiefe | 14 Bit |
| Auflösung | 256 x 256 px |
| LED Treiberchip | ICND2153S |
| Receivingcard | Novastar A5s+ |
| Scantyp | 1/32 |
| Refreshrate | ≥ 2.880 Hz |
| Horiz. Blickwinkel | +160° -160° |
| Vert. Blickwinkel | +140° -140° |
| Kontrast | > 5.400:1 |
| Spannungsbereich | AC 100-240V 50 Hz |
| Stromanschluss | Seetronic |
| Abmessungen (BxHxT) | 500 x 500 mm T=40 mm |
| IP Klasse | IP 40 (Front & Back) |
| Temperaturbereich | -15°C bis +40°C (Im Betrieb) -20°C bis +45°C (Lagernd) |
| Produkthighlights | Quick-Lock-System, Magnetic Fast-Rigg 100% Frontservice |

Zertifizierungen

