


vP2+B V3

Technisches Datenblatt

500 x 500 mm

BROMPTON R2 RECEIVINGCARD
 COLOR MATCHING TOOL
 1-6° CONCAVE
 HIGH-LEVEL
 BLACK-FACE
 QUICK-LOCK-SYSTEM
 MAGNETIC FAST-RIGG
 FAST REPLACEABLE BACKBOX

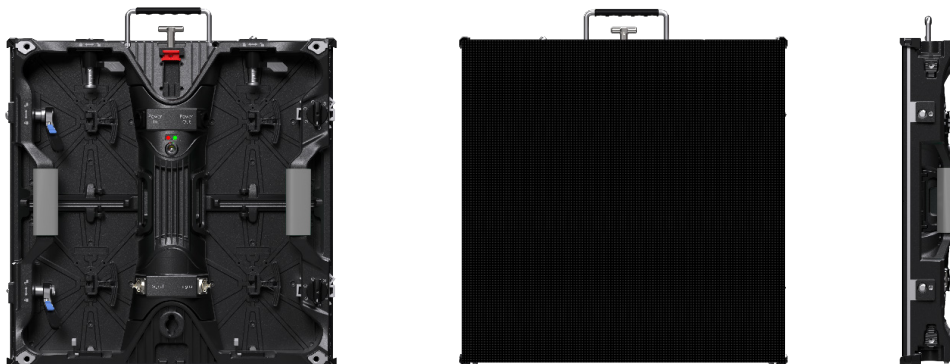

Pixelpitch	2,60 mm
Helligkeit	≥ 1.600 nits
Gewicht	8,5 kg
Nennleistung	Typisch 44 W max. 130 W
SMD-Typ	Nationstar BF1515 GW
SMD Merkmale	Black-Face, High-Level
Farbtiefe	Bis zu 16 Bit
Auflösung	192 x 192 px
LED Treiberchip	MBI5264
Receivingcard	Brompton R2
Scantyp	1/24
Refreshrate	≥ 3.840 Hz
Horiz. Blickwinkel	+140° -140°
Vert. Blickwinkel	+140° -140°
Kontrast	> 5.500:1
Spannungsbereich	AC 88-264V 50-60 Hz
Stromanschluss	Neutrik powerCON TRUE1 TOP
Abmessungen (BxHxT)	500 x 500 mm T = 80 mm
IP Klasse	IP 40 Front & Back
Temperaturbereich	-30°C bis +45°C (Im Betrieb) -10°C bis +55°C (Lagernd)
Produkthighlights	1-6° Konkave Installation, Color Matching Tool, Magnetic Fast-Rigg, Fast Replacable Backbox
Zertifizierungen	