


# RA155ix

## Technisches Datenblatt

496 x 496 mm

NOVASTAR A10S PRO RECEIVINGCARD  
URT TECHNOLOGY  
QUICK-LOCK-SYSTEM  
MAGNETIC FAST-RIGG  
CURVING UP TO 10° IN 2,5° STEPS

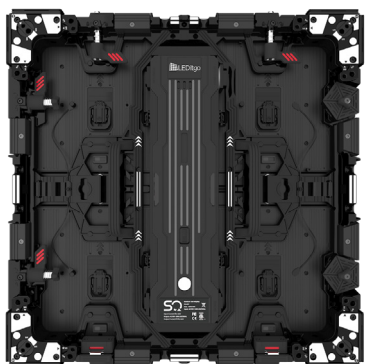

|                            |                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pixelpitch</b>          | 1,55 mm                                                                                                                                                                                                                                                                                                                                                 |
| <b>Helligkeit</b>          | ≥ 800 - 1.000 nits                                                                                                                                                                                                                                                                                                                                      |
| <b>Gewicht</b>             | 9,3 kg                                                                                                                                                                                                                                                                                                                                                  |
| <b>Nennleistung</b>        | Typisch 48 W   max. 200 W                                                                                                                                                                                                                                                                                                                               |
| <b>LED-Typ</b>             | GOB                                                                                                                                                                                                                                                                                                                                                     |
| <b>LED Merkmale</b>        | High-Level, Black-Face                                                                                                                                                                                                                                                                                                                                  |
| <b>Farbtiefe</b>           | 22 Bit                                                                                                                                                                                                                                                                                                                                                  |
| <b>Auflösung</b>           | 320 x 320 px                                                                                                                                                                                                                                                                                                                                            |
| <b>LED Treiberchip</b>     | CFD955                                                                                                                                                                                                                                                                                                                                                  |
| <b>Receivingcard</b>       | Novastar A10s Pro                                                                                                                                                                                                                                                                                                                                       |
| <b>Scantyp</b>             | 1/32                                                                                                                                                                                                                                                                                                                                                    |
| <b>Refreshrate</b>         | ≥ 3.840 Hz                                                                                                                                                                                                                                                                                                                                              |
| <b>Horiz. Blickwinkel</b>  | +160°   -160°                                                                                                                                                                                                                                                                                                                                           |
| <b>Vert. Blickwinkel</b>   | +160°   -160°                                                                                                                                                                                                                                                                                                                                           |
| <b>Kontrast</b>            | > 6.000:1                                                                                                                                                                                                                                                                                                                                               |
| <b>Spannungsbereich</b>    | AC 100-240V   50 Hz                                                                                                                                                                                                                                                                                                                                     |
| <b>Stromanschluss</b>      | Seetronic TR1                                                                                                                                                                                                                                                                                                                                           |
| <b>Abmessungen (BxHxT)</b> | 496 x 496 x 55 mm                                                                                                                                                                                                                                                                                                                                       |
| <b>IP Klasse</b>           | IP 40                                                                                                                                                                                                                                                                                                                                                   |
| <b>Temperaturbereich</b>   | -15°C bis +40°C (Im Betrieb)<br>-20°C bis +45°C (Lagernd)                                                                                                                                                                                                                                                                                               |
| <b>Produkthighlights</b>   | Quick-Lock-System, Magnetic Fast-Rigg,<br>100% Frontservice, Curvebarkeit bis 10°<br>konkav in 2,5° Schritten                                                                                                                                                                                                                                           |
| <b>Zertifizierungen</b>    |     |