


# aR-10,4

## Technisches Datenblatt

500 x 1.000 mm

HIGH BRIGHTNESS  
HIGH-CONTRAST  
LIGHT WEIGHT  
100% FRONT- AND BACKSERVICE

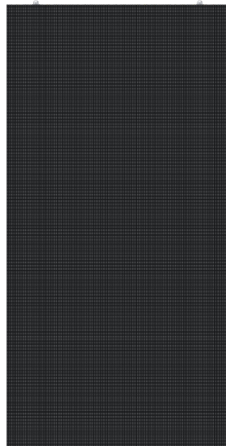

|                            |                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pixelpitch</b>          | 10,41 mm                                                                                                                                                                                                                                                                                                                                                |
| <b>Helligkeit</b>          | 7.000 nit                                                                                                                                                                                                                                                                                                                                               |
| <b>Gewicht</b>             | 14,5 kg                                                                                                                                                                                                                                                                                                                                                 |
| <b>Nennleistung</b>        | Typisch 135 W   max. 600 W                                                                                                                                                                                                                                                                                                                              |
| <b>SMD-Typ</b>             | SMD2727 3-in-1 GW                                                                                                                                                                                                                                                                                                                                       |
| <b>SMD Merkmale</b>        | High-Brightness, High-Contrast, High-Level                                                                                                                                                                                                                                                                                                              |
| <b>Farbtiefe</b>           | Bis zu 14 Bit                                                                                                                                                                                                                                                                                                                                           |
| <b>Auflösung</b>           | 48 x 96 px                                                                                                                                                                                                                                                                                                                                              |
| <b>LED Treiberchip</b>     | ICN2038S                                                                                                                                                                                                                                                                                                                                                |
| <b>Receivingcard</b>       | AT32                                                                                                                                                                                                                                                                                                                                                    |
| <b>Scantyp</b>             | 1/2                                                                                                                                                                                                                                                                                                                                                     |
| <b>Refreshrate</b>         | ≥ 1.920 Hz                                                                                                                                                                                                                                                                                                                                              |
| <b>Horiz. Blickwinkel</b>  | +140°   -140°                                                                                                                                                                                                                                                                                                                                           |
| <b>Vert. Blickwinkel</b>   | +140°   -140°                                                                                                                                                                                                                                                                                                                                           |
| <b>Kontrast</b>            | > 4.000:1                                                                                                                                                                                                                                                                                                                                               |
| <b>Spannungsbereich</b>    | AC 110-220V   50 / 60 Hz                                                                                                                                                                                                                                                                                                                                |
| <b>Stromanschluss</b>      | Seetronic TR1                                                                                                                                                                                                                                                                                                                                           |
| <b>Abmessungen (BxHxT)</b> | 500 x 1.000 mm   T= 74 mm                                                                                                                                                                                                                                                                                                                               |
| <b>IP Klasse</b>           | IP65 Front   IP54 Back                                                                                                                                                                                                                                                                                                                                  |
| <b>Temperaturbereich</b>   | -20°C bis +50°C (Im Betrieb)<br>-20°C bis +50°C (Lagernd)                                                                                                                                                                                                                                                                                               |
| <b>Produkthighlights</b>   | Light Weight, 100% Front- und Backservice                                                                                                                                                                                                                                                                                                               |
| <b>Zertifizierungen</b>    |     |