

aR-7,8

Technisches Datenblatt


500 x 500 mm

HIGH BRIGHTNESS

HIGH-CONTRAST

LIGHT WEIGHT

100% FRONT- AND BACKSERVICE

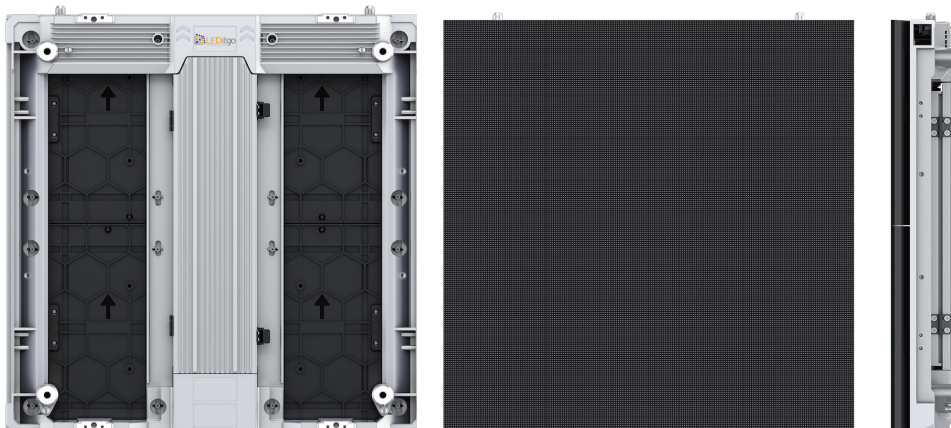

Pixelpitch	7,81 mm
Helligkeit	7.000 nit
Gewicht	7,5 kg
Nennleistung	Typisch 70 W max. 300 W
SMD-Typ	SMD2727 3-in-1 GW
SMD Merkmale	High-Brightness, High-Contrast, High-Level
Farbtiefe	Bis zu 14 Bit
Auflösung	64 x 64 px
LED Treiberchip	ICN2038S
Receivingcard	AT32
Scantyp	1/4
Refreshrate	≥ 1.920 Hz
Horiz. Blickwinkel	+140° -140°
Vert. Blickwinkel	+140° -140°
Kontrast	> 4.000:1
Spannungsbereich	AC 110-220V 50 / 60 Hz
Stromanschluss	Seetronic TR1
Abmessungen (BxHxT)	500 x 500 mm T= 74 mm
IP Klasse	IP65 Front IP54 Back
Temperaturbereich	-20°C bis +50°C (Im Betrieb) -20°C bis +50°C (Lagernd)
Produkthighlights	Light Weight, 100% Front- und Backservice

Zertifizierungen

UL CE  RoHS EMC