


RA193ix

Technisches Datenblatt

496 x 496 mm

NOVASTAR A10S PRO RECEIVINGCARD
URT TECHNOLOGY
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
CURVING UP TO 10° IN 2,5° STEPS

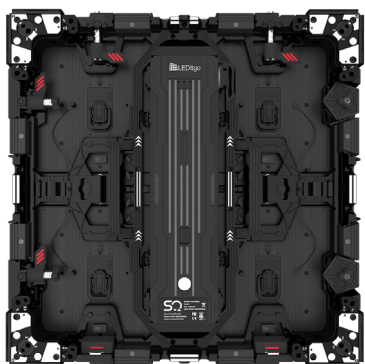

Pixelpitch	1,93 mm
Helligkeit	≥ 800 - 1.000 nits
Gewicht	8,5 kg
Nennleistung	Typisch 48 W max. 200 W
LED-Typ	GOB
LED Merkmale	High-Level, Black-Face
Farbtiefe	22 Bit
Auflösung	256 x 256 px
LED Treiberchip	CFD955 CCT (Common-Cathode-Technology)
Receivingcard	Novastar A10s Pro
Scantyp	1/32
Refreshrate	≥ 3.840 Hz
Horiz. Blickwinkel	+160° -160°
Vert. Blickwinkel	+160° -160°
Kontrast	> 6.000:1
Spannungsbereich	AC 100-240V 50 Hz
Stromanschluss	Seetronic TR1
Abmessungen (BxHxT)	496 x 496 x 55 mm
IP Klasse	IP 40
Temperaturbereich	-15°C bis +40°C (Im Betrieb) -20°C bis +45°C (Lagernd)
Produkthighlights	Quick-Lock-System, Magnetic Fast-Rigg, 100% Frontservice, Curvebarkeit bis 10° konkav in 2,5° Schritten
Zertifizierungen	   