
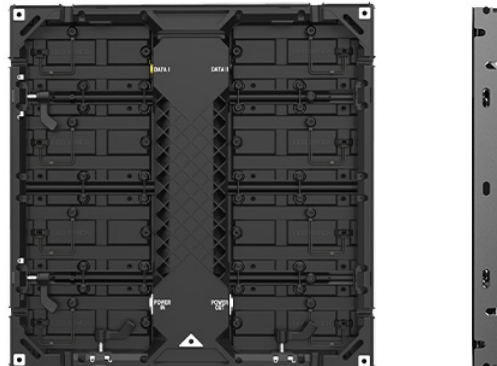


LB1.9

Technisches Datenblatt

500 x 500 mm

NOVASTAR A5S+ RECEIVINGCARD
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
100% FRONTSERVICE

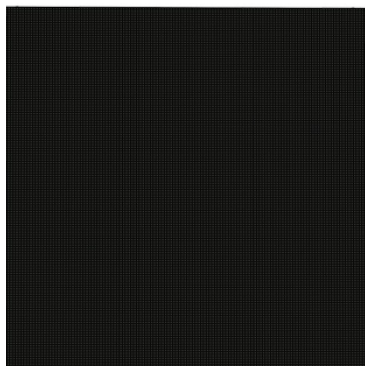

Pixelpitch	1,90 mm
Helligkeit	≥ 800 nits
Gewicht	5,6 kg
Nennleistung	Typisch 34 W max. 150 W
LED-Typ	SMD CW 1515
LED Merkmale	High-Level, Black-Face
Farbtiefe	14 Bit
Auflösung	256 x 256 px
LED Treiberchip	ICND2153S
Receivingcard	Novastar A5s+
Scantyp	1/32
Refreshrate	≥ 3.840 Hz
Horiz. Blickwinkel	+160° -160°
Vert. Blickwinkel	+140° -140°
Kontrast	> 5.400:1
Spannungsbereich	AC 100-240V 50 Hz
Stromanschluss	Seetronic Blau/Weiß
Abmessungen (BxHxT)	500 x 500 x 40 mm
IP Klasse	IP 40
Temperaturbereich	-15°C bis +40°C (Im Betrieb) -20°C bis +45°C (Lagernd)
Produkthighlights	Quick-Lock-System, Magnetic Fast-Rigg, 100% Frontservice

Zertifizierungen

